



# Quietgrid



Q-47K

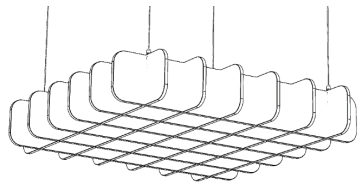


Q-71C

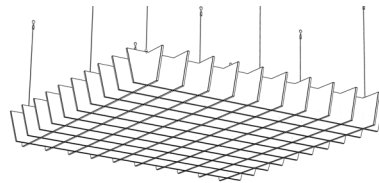


Q-95A

## HARDWARE OPTIONS



I-Lag



Cable Gripper Kit

## APPLICATIONS AND USAGE

Quietgrid cloud systems are designed to absorb sound and provide a clean three dimensional feel within a space. Ideal for education, offices, retail and lobbies.

## PANEL SPECIFICATIONS

Thickness	1/2"
NRC	0.75
Size	47", 71", 95"
Height	8"

## ENDS



A-Angled S-Straight C-Curved K-Chevron

## STANDARD COLORS



- UL Certified for no VOC's
- LEED & LBC Product Declarations
- Absorbing Sound Beautifully For A Lifetime

Declare



TVOC UL  
0.5mg/m<sup>3</sup>  
or less

## STATEMENT OF HAZARDOUS NATURE

Classified as Non-hazardous according to OSHA29C-FR1910.1200

## FIRST AID INFORMATION

SWALLOWED: Give a glass of water & seek medical advice.  
SKIN: Brush off. EYE: If the product comes into contact with the eye, immediately hold the eye open and wash with fresh water. If pain persists seek medical advice.

## FIRE FIGHTING MEASURES:

Alert fire department of location and nature of fire. Extinguish with water, fog, foam, or dry chemical. Product includes carbon monoxide. Material will shrink away from flame and may drip.

## PRODUCT DESCRIPTION

Non-woven, thermally bonded 100% polyester fiber panel. 65% recycled content, 100% recyclable. Class A Fire Rating per ASTM E84. CAS # 68604-67-1. Noise Reduction Coefficient (NRC) 0.50 per ASTM C423-09a.

## HANDLING AND STORAGE

Do not compress or bend product or package. Segregate from strong oxidizers. Keep covered, clean and dry.

## CLEANING & MAINTENANCE

Can be cleaned and maintained as follows: brush off, blow off with compressed air, clean by using a dry cleaning sponge, damp white cloth or similar. Heavy soiling or stains may require a cleaner similar to Resolve Carpet Cleaner or Spot Shot which should be used as directly. Heavily damaged panels should be replaced.


## LIMITED ONE-YEAR WARRANTY

F-SORB® has a limited One-Year Warranty. This warranty covers defects in the structural integrity of the panels. This warranty does not cover damage caused by fire, water, accident, or by any form of abuse.


1 (844) 313-7672  
www.fsorb.com




# Silentline Baffles

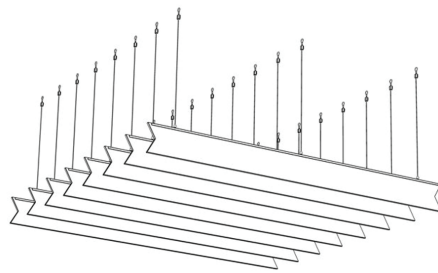

SL-95K-Transit-White-100-CG

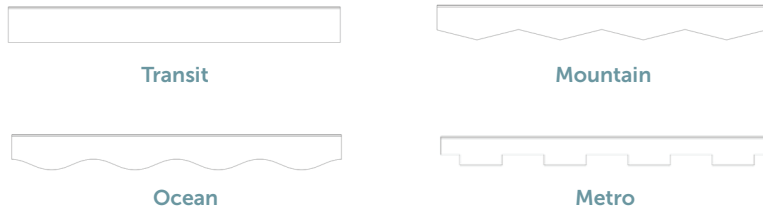

## HARDWARE AND ATTACHMENT OPTIONS



I-Lag



Cable Gripper Kit



(FH) F-Snap



(FL) Low



(TH) High



(TL) Low

## APPLICATIONS AND USAGE

Installs to standard USG  $\frac{1}{8}$ " T-Grid or Slot Bolt suspension system. Can be hung independently with c-channel, I-lags, or cable gripper stainless steel hardware.

## PANEL SPECIFICATIONS

Thickness	1/2"	1"	2"
NRC	0.75	0.95	1.20
Size	47"	95"	
Height	8"	12"	

(Spacing 12" on center)

## ENDS



A-Angled

S-Square

C-Curved

K-Chevron

## STANDARD COLORS



- UL Certified for no VOC's
- LEED & LBC Product Declarations
- Absorbing Sound Beautifully For A Lifetime

Declare



TVOC UL  
0.5mg/m<sup>3</sup>  
or less

## STATEMENT OF HAZARDOUS NATURE

Classified as Non-hazardous according to OSHA29C-FR1910.1200

## FIRST AID INFORMATION

SWALLOWED: Give a glass of water & seek medical advice.

SKIN: Brush off. EYE: If the product comes into contact with the eye, immediately hold the eye open and wash with fresh water. If pain persists seek medical advice.

## FIRE FIGHTING MEASURES

Alert fire department of location and nature of fire. Extinguish with water, fog, foam, or dry chemical. Product includes carbon monoxide. Material will shrink away from flame and may drip.

## PRODUCT DESCRIPTION

Non-woven, thermally bonded 100% polyester fiber panel. 65% recycled content, 100% recyclable. Class A Fire Rating per ASTM E84. CAS # 68604-67-1. Noise Reduction Coefficient (NRC) 0.50 per ASTM C423-09a.

## HANDLING AND STORAGE

Do not compress or bend product or package. Segregate from strong oxidizers. Keep covered, clean and dry.

## CLEANING & MAINTENANCE

Can be cleaned and maintained as follows: brush off, blow off with compressed air, clean by using a dry cleaning sponge, damp white cloth or similar. Heavy soiling or stains may require a cleaner similar to Resolve Carpet Cleaner or Spot Shot which should be used as directly. Heavily damaged panels should be replaced.


## LIMITED ONE-YEAR WARRANTY

F-SORB® has a limited One-Year Warranty. This warranty covers defects in the structural integrity of the panels. This warranty does not cover damage caused by fire, water, accident, or by any form of abuse.


1 (844) 313-7672  
www.fsorb.com




# Quietgrid 48

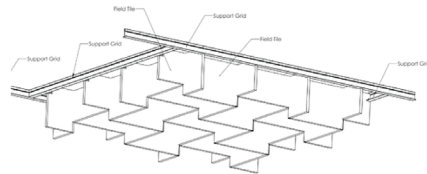


Metro Block

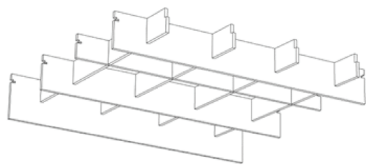


Transit



Mountain



Ocean



Metro

## APPLICATIONS AND USAGE

Quietgrid cloud systems are designed to absorb sound and provide a clean three dimensional feel within a space. Works with  $\frac{1}{16}$ " wide grid systems. Systems easily install for seismic compliance.

## PANEL SPECIFICATIONS

Thickness	1/2"
NRC	0.95
Size	8"
Height	8" 12"

## ENDS



L-Lay in



LS-Lift & Shift

## STANDARD COLORS



- UL Certified for no VOC's
- LEED & LBC Product Declarations
- Absorbing Sound Beautifully For A Lifetime

Declare



TVOC UL  
0.5mg/m<sup>3</sup>  
or less

## STATEMENT OF HAZARDOUS NATURE

Classified as Non-hazardous according to OSHA29C-FR1910.1200

## FIRST AID INFORMATION

SWALLOWED: Give a glass of water & seek medical advice.

SKIN: Brush off. EYE: If the product comes into contact with the eye, immediately hold the eye open and wash with fresh water. If pain persists seek medical advice.

## FIRE FIGHTING MEASURES

Alert fire department of location and nature of fire. Extinguish with water, fog, foam, or dry chemical. Product includes carbon monoxide. Materiel will shrink away from flame and may drip.

## PRODUCT DESCRIPTION

Non-woven, thermally bonded 100% polyester fiber panel. 65% recycled content, 100% recyclable. Class A Fire Rating per ASTM E84. CAS # 68604-67-1. Noise Reduction. Coefficient (NRC) 0.50 per ASTM C423-09a.

## HANDLING AND STORAGE

Do not compress or bend product or package. Segregate from strong oxidizers. Keep covered, clean and dry.

## CLEANING & MAINTENANCE

Can be cleaned and maintained as follows: brush off, blow off with compressed air, clean by using a dry cleaning sponge, damp white cloth or similar. Heavy soiling or stains may require a cleaner similar to Resolve Carpet Cleaner or Spot Shot which should be used as directly. Heavily damaged panels should be replaced.

## LIMITED ONE-YEAR WARRANTY

F-SORB® has a limited One-Year Warranty. This warranty covers defects in the structural integrity of the panels. This warranty does not cover damage caused by fire, water, accident, or by any form of abuse.

1 (844) 313-7672  
www.fsorb.com

